

MAGNETIC TRACK LIGHT (V5)



APPLICATION



MAGNETIC TRACK LIGHT

RECESSED/PENDENT LED ALUMINUM SECTION LIGHT, IP 20.

DESIGNED AND CREATED FOR ARTISTIC / DECORATIVE AND MAIN INDOOR LIGHTING.

BODY

MADE OF DIE CAST ALUMINUM RING ELECTROSTATIC COATED AFTER PHOSPHO - CHROMATATION. HEAT SINK WITH SPECULAR REFLECTOR, GLASS DIFFUSER.


LEDs

AVAILABILITY OF DIFFERENT COLOR TEMPERATURES.


ITEM CODE	ITEM DESCRIPTION	POWER (w)	POWER FACTOR	LUMEN (LM)	EFFICACY (LM/W)	BEAM ANGLE	CRI	CCT (K)	CUT OUT	DIMINTION
MTL (V5) 10W D100-3k	MAGNETIC TRACK LIGHT 10W 3000K D 100X45-IP 20	10	0.9	1000	100	15°/24°/36°	90	3000K	-	100X45
MTL (V5) 10W D100-4k	MAGNETIC TRACK LIGHT 10W 4000K D 100X45-IP 20	10	0.9	1000	100	15°/24°/36°	90	4000K	-	100X45
MTL (V5) 10W D100-6k	MAGNETIC TRACK LIGHT 10W 6000K D 100X45-IP 20	10	0.9	1000	100	15°/24°/36°	90	6000K	-	100X45
MTL (V5) 15W D115-3k	MAGNETIC TRACK LIGHT 15W 3000K D 115X55-IP 20	15	0.9	1500	100	15°/24°/36°	90	3000K	-	115X55
MTL (V5) 15W D115-4k	MAGNETIC TRACK LIGHT 15W 4000K D 115X55-IP 20	15	0.9	1500	100	15°/24°/36°	90	4000K	-	115X55
MTL (V5) 15W D115-6k	MAGNETIC TRACK LIGHT 15W 6000K D 115X55-IP 20	15	0.9	1500	100	15°/24°/36°	90	6000K	-	115X55
MTL (V5) 20W D135-3k	MAGNETIC TRACK LIGHT 20W 3000K D 135X65-IP 20	20	0.9	2000	100	15°/24°/36°	90	3000K	-	135X65
MTL (V5) 20W D135-4k	MAGNETIC TRACK LIGHT 20W 4000K D 135X65-IP 20	20	0.9	2000	100	15°/24°/36°	90	4000K	-	135X65
MTL (V5) 20W D135-6k	MAGNETIC TRACK LIGHT 20W 6000K D 135X65-IP 20	20	0.9	2000	100	15°/24°/36°	90	6000K	-	135X65



DIMENSION

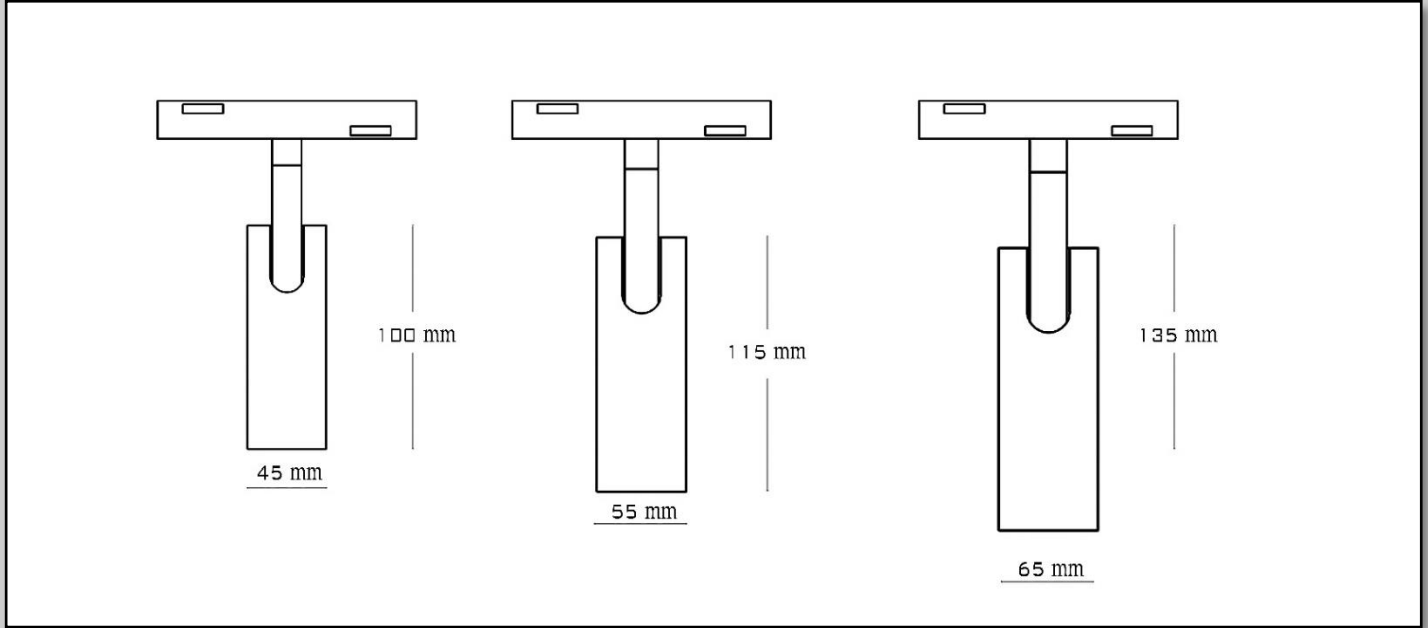

PHOTOMETRIC DATA

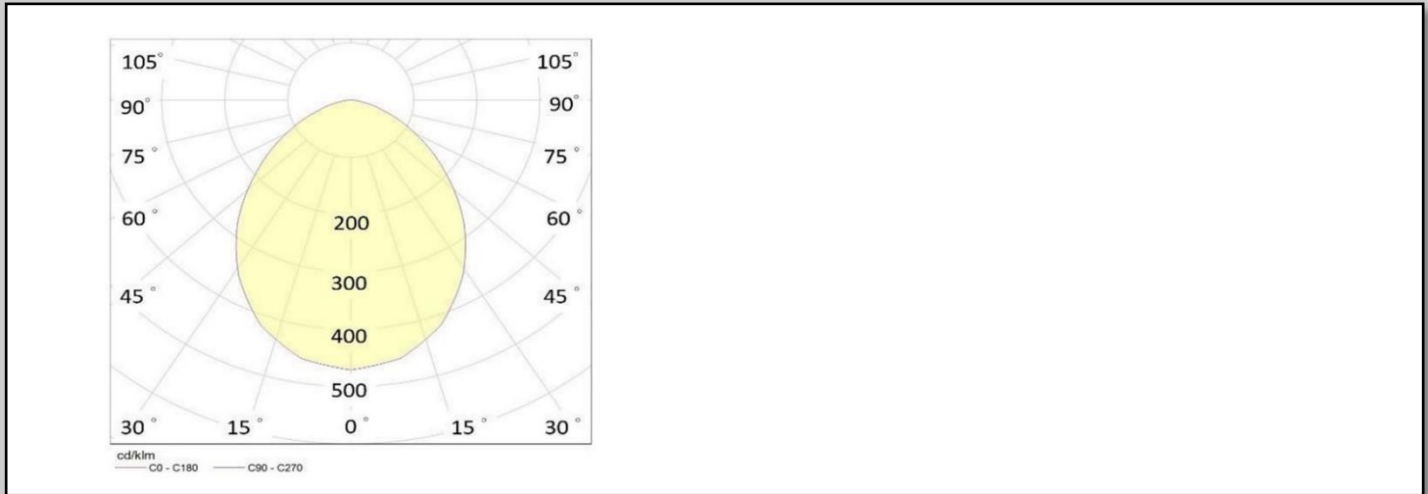

TRACK SYSTEM

